




WILDCAT POWER GEN

PROVIDING BETTER POWER

RENEGADE DIESEL: 10KW-15KW

The Renegade generator was designed with rugged simplicity in mind. Three phase, open skid or enclosed packages designed to run for extended periods of time with prime rated liquid cooled engine platforms.

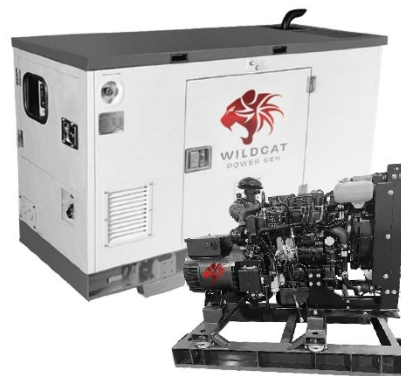

Durable Industrial Engine

- Usually reserved for industrial applications, the Renegade's power plant is a premier industrial fixed speed (1,800 RPM) engine built to provide strong, reliable power without giving up quiet operation and engine longevity.

Quality Clean Power

- Voltage regulation ensures that electronics are safely powered with less 5% total harmonic distortion (THD) at no load.

NFPA-110

- Wildcat designed the Renegade to exceed NFPA-110, Level 2 Emergency Power Supply Systems (EPSS) by providing prime power (PP) to meet EPSS Class 168 Type 10.

Digital Controls

- Designed for single genset applications, the Renegade's digital controls monitor the genset's voltage, current, power, frequency, engine speed, oil pressure and coolant temperature on a back-lit LCD display for ease of use.

Industrial Class Alternator

- Protected with Class H insulation and standard 40°C nominal rating, the Renegade's standard 12-wire winding and 2/3 pitch meet all key international standards and regulations.

Easy to Service

- Preventative maintenance and in-field repairs are made easier with our simplified engineering and non-proprietary parts.

GENERATOR SET RATING

Model	Voltage	Power Factor	Phase	Hertz	Minimum Circuit Breaker Amps	kW / kVA	BMEP (Bar)	BSFC (g/hp*hr)	Emission Compliance	Controller
Renegade Diesel 10KW RE0010D4**XP	208 / 120 240 / 120 480 / 277	0.8	3	60	40A (208V) 40A (240V) 25A (480V)	9.5 / 11.5 10.0 / 12.0 10.0 / 12.0	7.2	168	Tier 4F	DeepSea
Renegade Diesel 15KW RE0015D4**XP	208 / 120 240 / 120 480 / 277	0.8	3	60	63A (208V) 50A (240V) 25A (480V)	15.0 / 17.0 15.0 / 17.0 15.0 / 17.0	7.2	175	Tier 4F	DeepSea



WILDCAT
POWER GEN

PROVIDING
BETTER POWER

RENEGADE

ENGINE SPECIFICATIONS

Engine

Manufacturer	KOEL
Type	R550 Series Industrial Powertrain 4 Cycle, Naturally Aspirated
Speed (RPM)	1800
Cylinder Arrangement	Inline 2 / Inline 3
Displacement (L)	1.1L / 1.65L
Bore & Stroke (in / mm)	3.385" x 3.7" / 86 x 94
Compression Ratio	19.7:1
Governor Type	Electronic
Frequency Regulation Steady State	+/-0.25%
Frequency Regulation No-load to Full-load	Isochronous, Constant Speed
Air Filter Type	Dry
Limited Warranty	3 Years, 5,000 Hours

Lubrication System

Type	Full Pressure
Oil Capacity (qt / L)	3.49 / 3.30 (2R550) 6.23 / 5.95 (3R550)
Oil Filter (Quantity / Type)	1/Spin-On

Cooling System

Radiator Type	Horizontal Copper Alloy
Fan Type	Pusher

Sound Rating at 7 Meters, Lowest Side

75% Load	70 dB(A)
----------	----------

Engine Crankcase Vent System

Engine Crankcase Vent System	Closed Crankcase Vent
---------------------------------	-----------------------

Electrical System

Ignition System	Compression Ignition
Battery Quantity	1
Battery Voltage (VDC)	12
Battery CCA (A)	900
Battery Charging Alternator	
Ground (Negative/Positive)	Negative
Voltage (VDC)	12
Amperage (A)	40
Starter Motor Voltage (VDC)	12

Exhaust System

Exhaust Manifold Type	Dry
Exhaust Flow at Rated Load (Kg/hr)	65 / 97
Exhaust Temperature at Rated Load (°F / °C)	1,202 / 650
Maximum Allowable Back Pressure (in Hg / kPa)	3.3±1.0

Fuel System

Fuel Type	Ultra-Low Sulfur Diesel
Fuel Injection Pump	Mechanical Fuel Injection Pump
Fuel Filter	0.6 liter Single bowl Spin-on
Fuel Tank (10KW / 15KW)	8.7 gal / 9.5 gal

Fuel Consumption

	Full Load	1/2 Load	No Load
2R550	0.84 GAL / HR	0.47 GAL / HR	0.19 GAL / HR
3R550	1.09 GAL / HR	0.61 GAL / HR	0.31 GAL / HR

STANDARD CONTROLLER



WILDCAT POWER GEN DeepSea Controller

- User-friendly control panel for troubleshooting
- Conveniently monitors diagnostic conditions, displays system fault codes and sets weekly exercise cycle
- Easy-to-read alpha-numeric scrolling display
- Three Phase generator application
- UL recognized

Engine Output Deratings

Rated Temperature (°F / °C)	77 / 25
Rated Altitude	328 ft (100 m) Above Sea Level
Temperature Derate	1.5% for Each 10°F (5.6°C) Above Rated Temperature
Altitude Derate	2.5% for Each 1000 ft (305 m) Above Rated Altitude



WILDCAT
POWER GEN

PROVIDING
BETTER POWER

RENEGADE

ALTERNATOR SPECIFICATIONS

	Renegade 10KW 3-Phase Tier 4F	Renegade 15KW 3-Phase Tier 4F
Model	RE0010D4**XP	RE0015D4**XP
Alternator Model	LSAP 40E	LSAP 40E/H
Manufacturer	Leroy Somer	Leroy Somer
Type	Brushless, 12-Lead	Brushless, 12-Lead
Frequency (Hz)	60	60
Phase	3	3
Winding Configuration	Series Star Parallel Star Series Delta	Series Star Parallel Star Series Delta
Exciter Type	Shunt	Shunt
Number of Poles	4	4
Voltage Regulator	R120	R120
Insulation Rating	Class H	Class H
Designed Temperature Rise Limit	125 °C	125 °C
Bearing (Quantity / Type)	1/Sealed	1/Sealed
Coupling	Flexible Disk	Flexible Disk
Amortisseur Windings	Full	Full
Voltage Regulation, NL to FL	+/- 1.0%	+/- 1.0%
One Step Load Acceptance	100% of Rating	100% of Rating
Total Harmonic Distortion (THD), NL to FL	<3.5%	<3.5%
• Complete winding protection for non-harsh environment with relative humidity ≤60%. Space heater required for ≤95%. IP23 Protection.		• Manufactured according to the following standards: ISO 3046, ISO 8528-1, ISO 8528-5, IEC 60034-1, IS: 13364

Weight & Dimensions

Assembled Weight (lbs / kg)	10KW: 1,453 LBS / 659 KG	15KW: 1,547 LBS / 701 KG
Overall Dimensions (in)	10KW: 71" L x 30.4" W x 47" H	15KW: 72" L x 33" W x 47.5" H

Need help? Visit wildcatpowergen.com

Complete the web form and a local dealer will contact you to answer questions on our generators and accessories.

620-500-5111

**Never Lose Power Again
With Wildcat Power Gen**